

Infeed Hopper

Dimensions fixed for purpose - customized solutions


STANDARD AND HEAVY DUTY VERSION



INFEED HOPPER WITH INSPECTION LID

The JS Standard infeed hopper which holds a volume of 600 L consists of a metal container designed to give the product optimal access to the screw.

A bend in the wall of the bin, which partially goes over the screw, effectively helps the product to be pushed forward to the pump.

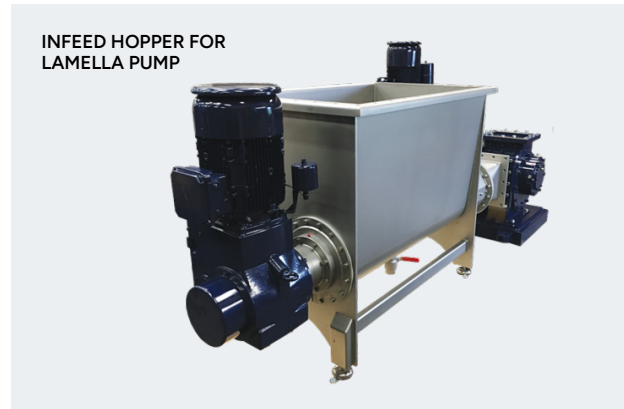


INFEED HOPPER FOR LAMELLA PUMP

Add ons:

- Inspection lid at outlet.
- Heavy Duty Version with bearing housing and breaker knife.

Recommendations:

We strongly recommend using a frequency converter to operate the hopper.

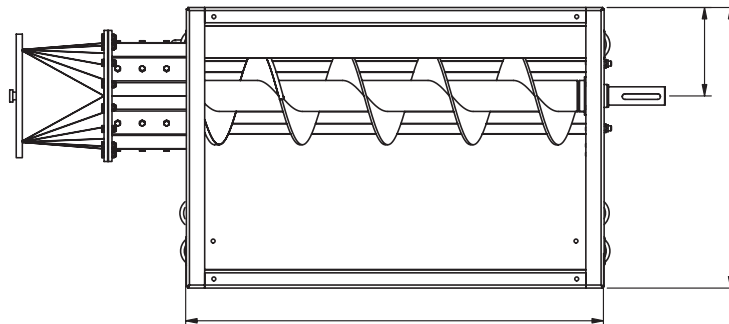

Capacity guideline

	RPM	CAPACITY m ³ /h	APPROX kW
Animal by-product:	7	5	2,2 - 5,5
Estimated 60-70% filling of auger	21	15	5,5 - 7,5
Hard product = More torque	34	25	7,5 - 11
Fish and by-product:	10	10	2,2 - 4
Estimated 80% filling of auger	26	25	4 - 7,5
Soft product = Less torque	51	50	7,5 - 11

Please note: The guideline is indicative. Contact us for more specific info.